


2/2 WAY PILOT OPERATED SOLENOID VALVE, G 3/8" ÷ G 3/4", HIGH PRESSURE



normally closed

TYPE: D232/233/234

TECHNICAL SPECIFICATIONS

Media: water, oil, air

Media temperature: -10°C ÷ +130°C

Ambient temperature: -10°C ÷ +50°C

Body material: brass (CW617N EN 12165)

Orifice material: stainless steel (AISI 303 EN 10088-3)

Operator material: stainless steel

Operator seal material: Ruby

Diaphragm material: FKM

Main seal material: PTFE

Coil power: AC 18VA (holding)

AC 36VA (inrush)

DC 14W

Protection class: IP 65 (with connector)




OPTIONS

Normally open (Ex. code RD232DTW) with coils class "H" only

FKM main seal for air, water, oil MAX 130°C (Ex. code D233DYW)

MAX OPD: 25 bar AC / DC

SELECTION TABLE	VALVE	G connection	Nominal Diameter	Flow rate kvs	OPD		COILS	
	Code	[ISO 228]	[mm]	[l/min]	min	max	Code	[Volts/Hz]
	D232DTW	3/8"	15.5	31	1	50	7250	24V DC
	D233DTW	1/2"	15.5	35	1	50	7200	24V 50/60Hz
	D234DTW	3/4"	15.5	37	1	50	7400	110V 50Hz - 120V 60Hz
							7600	200V 50Hz - 220V 60Hz
							7700	230V 50Hz - 240V 60Hz

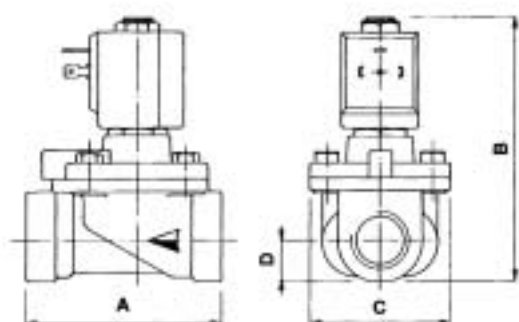

DIMENSIONS & WEIGHTS

G connection	A	B	C	D	weight
[ISO 228]	[mm]	[mm]	[mm]	[mm]	[Kg]
3/8"	86	115	50	17.5	0.9
1/2"	86	115	50	17.5	0.9
3/4"	86	115	50	17.5	0.9